


2.0DA ACOUSTICAL DOVETAIL ROOF DECK

ACOUSTICAL SOLUTIONS

REDUCE INTERIOR NOISE WITH THE SOUND ABSORPTION CAPABILITIES OF 2.0DA ACOUSTICAL ROOF DECK

2.0DA ACOUSTICAL DECK

- 2" Deep Deck
- FM Approved¹
- IAPMO UES ER-423

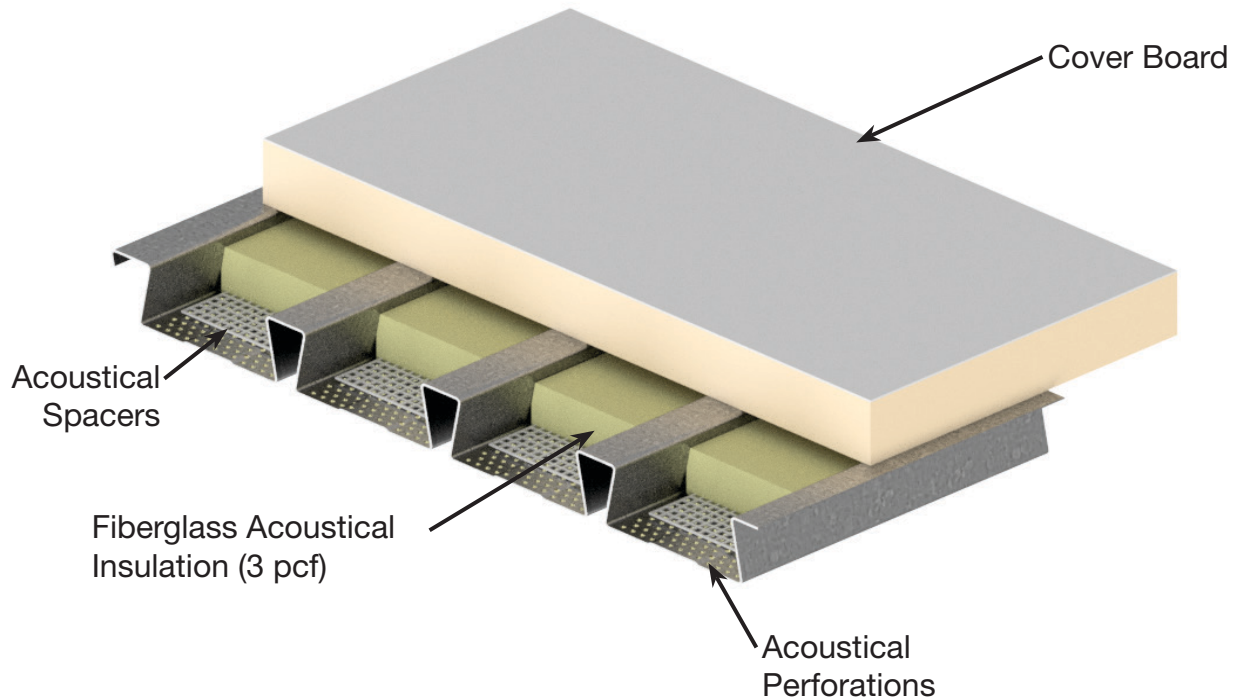

Noise Reduction Coefficients

Cover Board	Deck Insulation	Absorption Coefficients						SSA	NRC	RAL Test No.
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz			
2" Poly-Iso	Plain	0.19	0.54	1.15	1.07	1.01	0.79	0.95	0.95	A14-170
	Encapsulated	0.35	0.82	1.15	0.99	0.97	0.72	0.96	1.00	A14-167
2" Fiberglass	Plain	0.74	1.40	1.25	1.03	0.98	0.80	1.14	1.15	A14-169
	Encapsulated	0.62	1.18	1.08	0.93	0.97	0.77	1.02	1.05	A14-168

Notes:

1. See Factory Mutual Approval Report for complete assembly details.
2. The acoustical test reports with complete assembly details are available from www.dovetaildeck.com.

The information in this product data sheet is presented for general information only and is not to be used or relied upon for any application without independent verification by a professional engineer or other qualified professional. Vulcraft and Verco expressly disclaim (i) any and all representations, warranties and conditions, express or implied, related to the information in this product data sheet, including but not limited to warranties of merchantability, fitness for a particular purpose, and non-infringement; and (ii) any and all liability whatsoever arising out of or related to this product data sheet or its use, including but not limited to liability by reason of death, personal injury or damage to property.

VULCRAFT and VERCO are registered trademarks of Nucor Corporation or its affiliates.